Fast Ferry Jet Tube - UK

- Resimac was awarded the contract to resurface the jet tubes on a UK based fast ferry

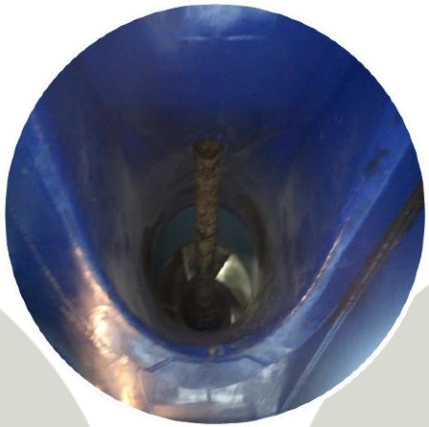

Surface Prep

- All surfaces were abrasive blast cleaned to SA2.5, 75 micron profile

Application

- The damaged surface was rebuilt 201 Ceramic Repair Paste
- Once cured the jet tube was coated with 2 x coast of 203 Super Flow

Project Completion

- The jet tubes were checked 12 months later and only minor touch work was required

resimac Ltd.